




44SP 6

6" submerged pumps

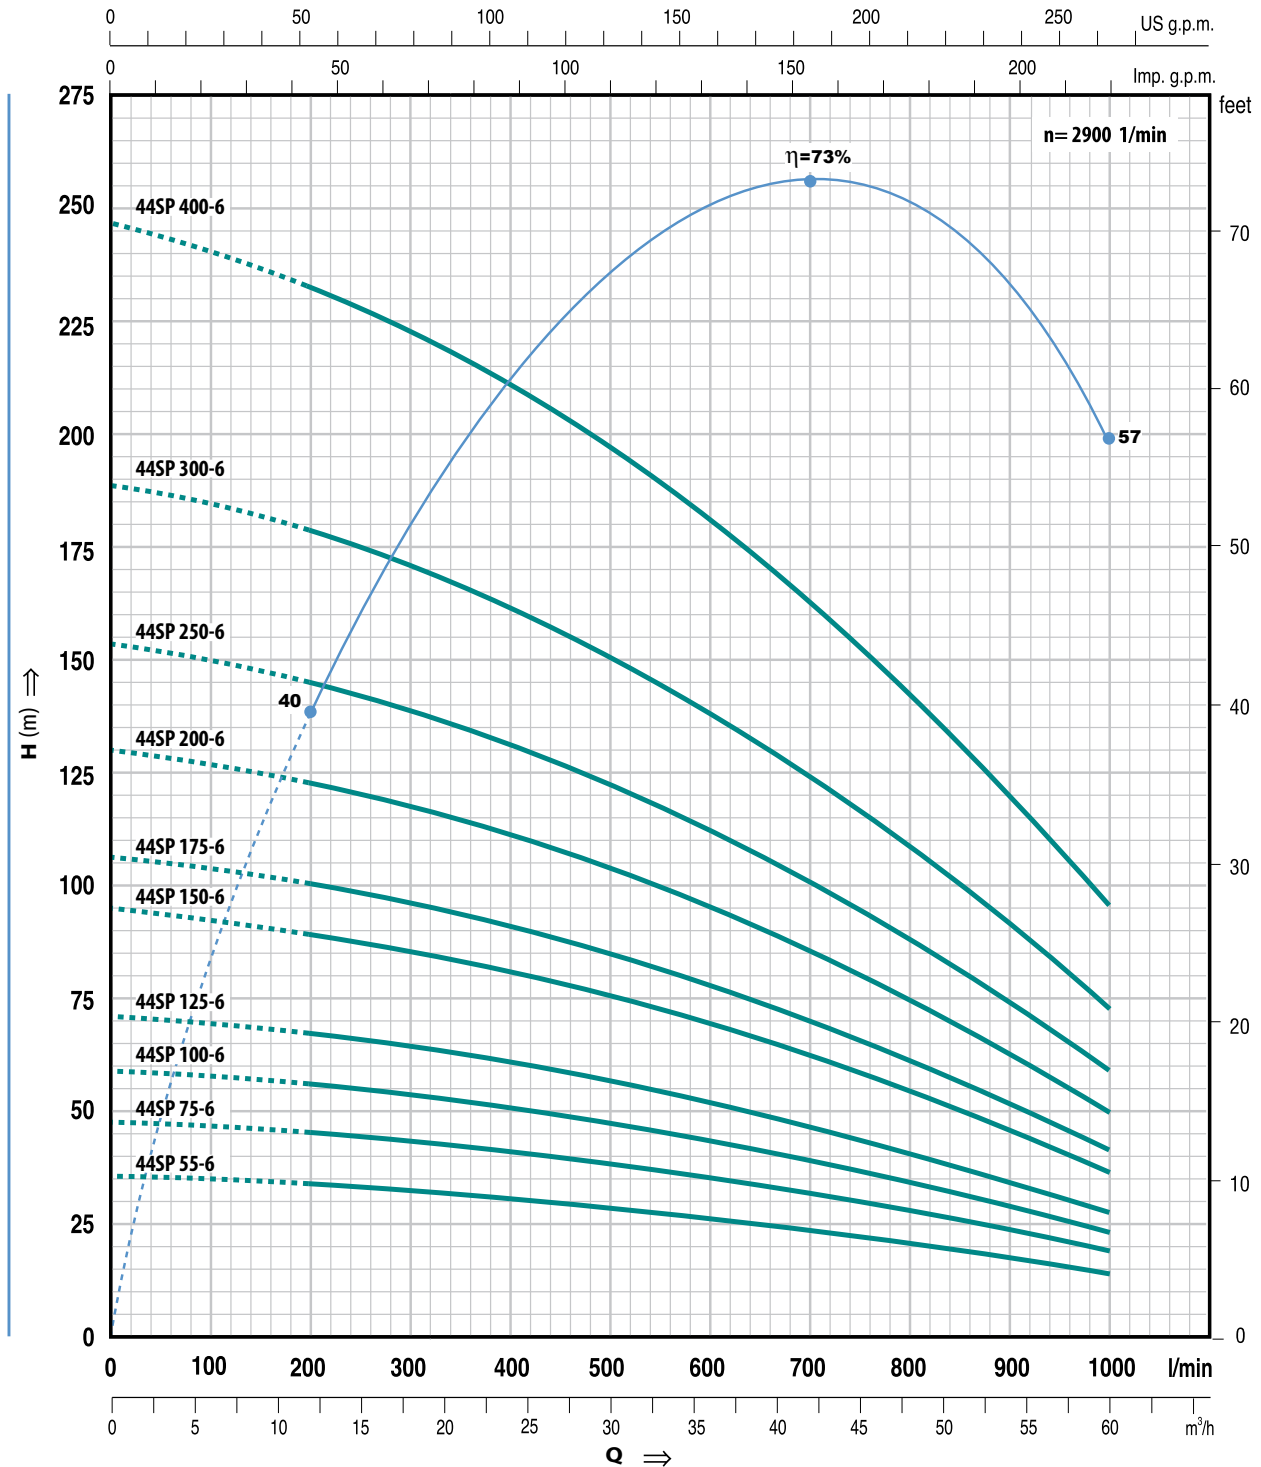

Q = Flow rate H = Total manometric head

Tolerance of the performance curves according to EN ISO 9906 App. A.

TYPE	POWER		m ³ /h l/min	H metres												
	kW	HP		0	200	300	400	500	600	700	800	900	1000			
Three-phase				0	12	18	24	30	36	42	48	54	60			
44SP55-6	4	5.5		35	33	31	30	28	26	23	20	17	13			
44SP75-6	5.5	7.5		47	44	42	40	37	34	31	27	23	18			
44SP100-6	7.5	10		58	54	52	49	46	43	38	33	28	22			
44SP125-6	9.2	12.5		70	65	62	59	56	51	46	40	34	26			
44SP150-6	11	15		93	87	83	79	74	68	61	53	45	35			
44SP175-6	13	17.5		105	98	93	89	83	77	69	60	51	39			
44SP200-6	15	20		128	120	114	109	102	94	84	73	62	48			
44SP250-6	18.5	25		151	141	135	128	120	111	99	86	73	57			
44SP300-6	22	30		186	174	166	158	148	136	122	106	90	70			
44SP400-6	30	40		244	228	218	207	194	179	160	139	118	92			