



Water & Sewage  
Pumping and  
Treatment Engineers

*The Pump People.*


Amos Pumps (UK) Ltd  
Wendron, Helston,  
Cornwall. TR13 0PY  
Tel: 01326-573341

Email: [info@amospumps.com](mailto:info@amospumps.com)  
Web site: [amospumps.com](http://amospumps.com)

## Submersible 4" Borehole

Inox submersible borehole pumps are ideal for pumping water from deep wells or boreholes to supply farm, industry or domestic requirements. They are supplied with the Franklin motor, standard control box and heat shrink jointing kit. We are able to offer various sizes of borehole cable and the full range of accessories for your installation.

### Technical Data Sheet 6SP-4

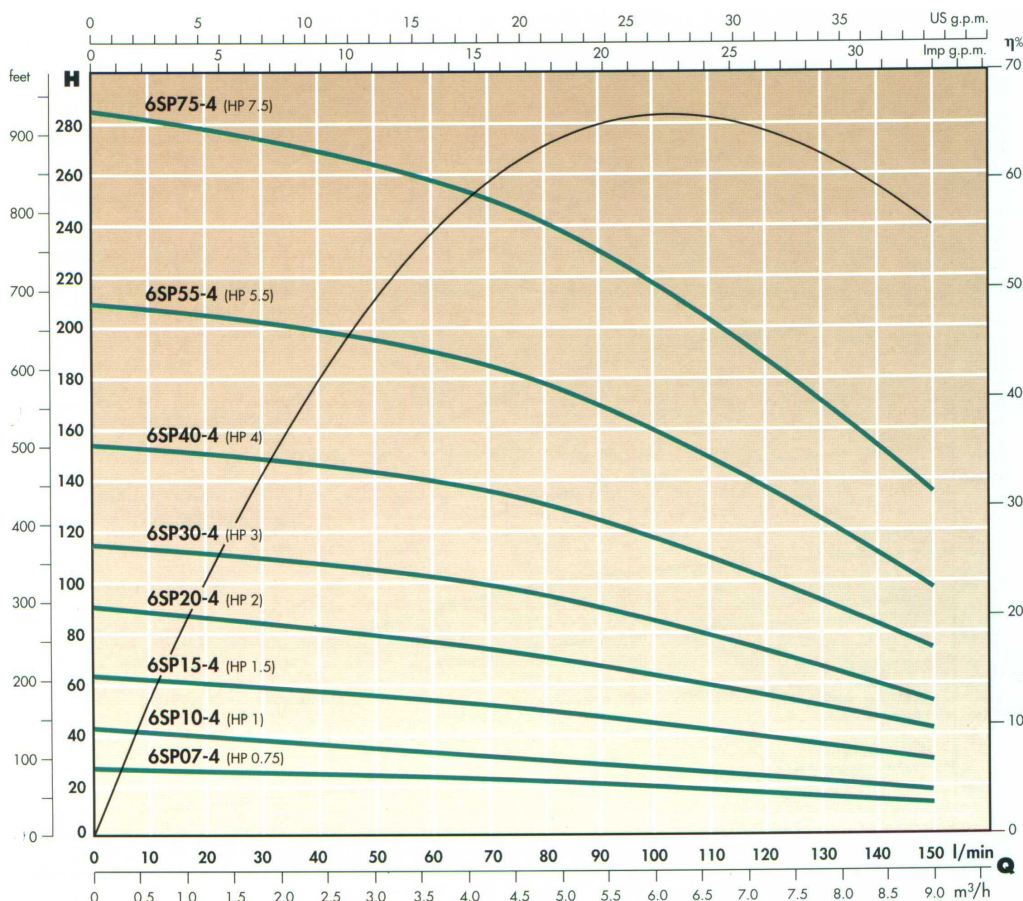

TYPE		POWER		m³/h	0	1.5	3.0	4.5	6.0	7.5	9
1~	3~	kW	HP	l/min	0	25	50	75	100	125	150
6SP07-4M	6SP07-4	0.55	0.75	m	27	26	25	23	20	17	13
6SP10-4M	6SP10-4	0.75	1		41	39	37	35	31	26	19
6SP15-4M	6SP15-4	1.1	1.5		61	59	56	52	46	39	29
6SP20-4M	6SP20-4	1.5	2		88	85	81	76	67	56	41
6SP30-4M	6SP30-4	2.2	3		115	112	107	99	87	73	54
—	6SP40-4	3	4		155	151	144	134	118	99	73
—	6SP55-4	4	5.5		209	204	194	181	160	134	98
—	6SP75-4	5.5	7.5		285	276	263	245	215	180	135

### Standard Control Box



The spacious box has a capacitor and overload with a wiring diagram inside the cover.

### Build materials

Discharge head	OT58 brass alloy	Motor bracket	Brass alloy (NEMA stdnd.)
Pump shaft	Stainless steel AISI 304	Motor coupling	S/steel sinterised AISI 304
External sleeve	Stainless steel AISI 304	Impellers	Technopolymer (Lexan)
Screws	Stainless steel AISI 304	Supply cable	HO7RNF
Diffusers	Technopolymer (Noryl)	Bowls	Stainless steel AISI 304
Non-return valve	Technopolymer	Suction strainer	Stainless steel AISI 304

Visit our website for details of our full range of pumps and accessories. [www.amospumps.co.uk](http://www.amospumps.co.uk)

## Borehole Pump Accessories

### Heat Shrink Joint

When cable is ordered with a borehole pump, we can if required make the joint onto the cable free of charge. Joints can also be bought separately.



### Low Level Controls

In cases of low yielding boreholes, probes can be inserted to switch off the pump before running dry and on again when water is available to be pumped.

### Polypropylene Rope

Used to support the weight of the pump when in service, many sizes are available.

### Borehole Cable

We carry in stock 1.5, 2.5 & 4.0 sq. mm borehole cable for borehole motors.

### Water Filtration

Various types of filtration and treatments are available from the removal of debris to pH correction.

Ultra Violet disinfection can be inserted into the system, many sizes are available to suit flow rates.

