




8SP 4

4" submerged pumps

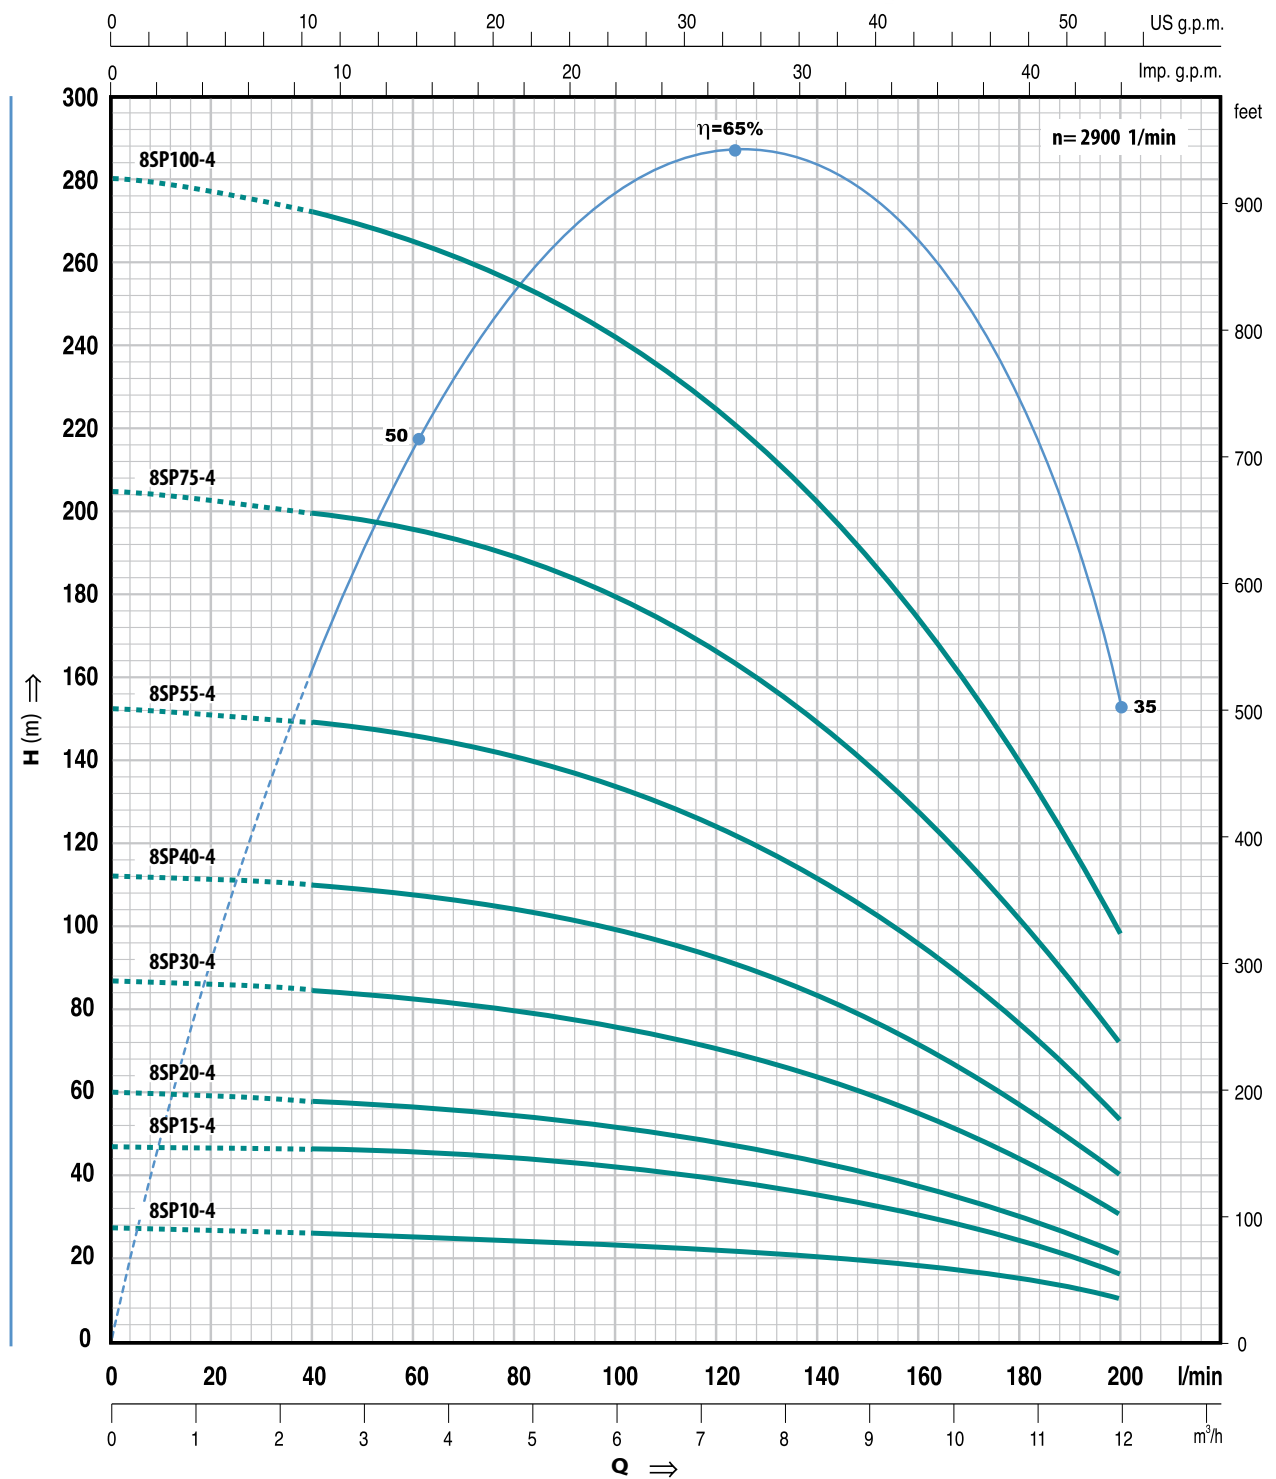

Q = Flow rate H = Total manometric head

Tolerance of the performance curves according to EN ISO 9906 App. A.

TYPE		POWER		m³/h l/min	0	2.4	3.6	4.8	6.0	7.2	8.4	9.6	10.8	12.0
Single-phase	Three-phase	kW	HP		0	40	60	80	100	120	140	160	180	200
8SP10-4M	8SP10-4	0.75	1	H metres	27	26	25	24	23	22	20	17	13	10
8SP15-4M	8SP15-4	1.1	1.5		47	46	45	43	41	38	34	29	23	16
8SP20-4M	8SP20-4	1.5	2		60	58	57	55	52	48	43	37	30	21
8SP30-4M	8SP30-4	2.2	3		87	85	83	80	76	70	63	54	43	30
---	8SP40-4	3	4		112	110	108	104	99	92	82	70	56	40
---	8SP55-4	4	5.5		153	150	146	141	134	124	111	95	76	53
---	8SP75-4	5.5	7.5		205	200	196	190	181	167	149	128	103	72
---	8SP100-4	7.5	10		280	272	266	257	244	225	202	175	140	98