




# 10SP 4

4" submerged pumps

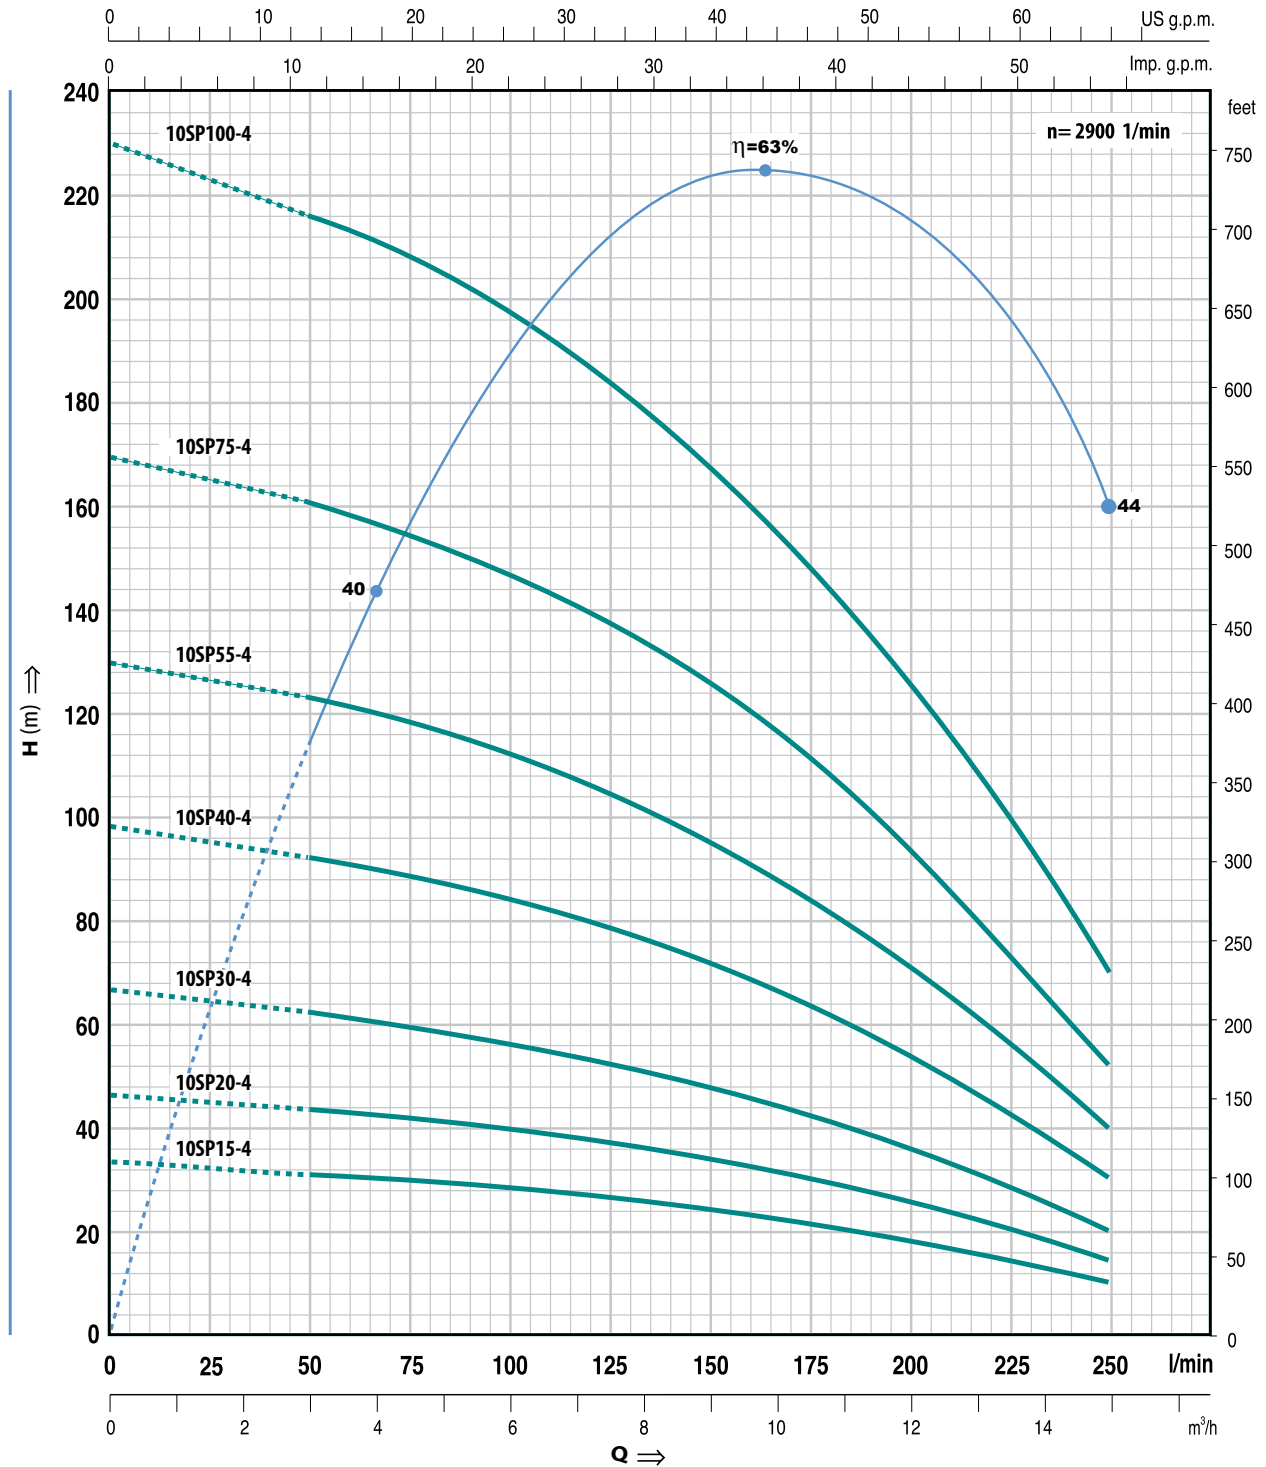

Q = Flow rate H = Total manometric head

Tolerance of the performance curves according to EN ISO 9906 App. A.

TYPE		POWER		m <sup>3</sup> /h l/min	0	3.0	4.5	6.0	7.5	9.0	10.5	12	13.5	15.0
Single-phase	Three-phase	kW	HP		0	50	75	100	125	150	175	200	225	250
---	10SP15-4	1.1	1.5	H metres	33	31	30	28	26	24	21	18	14	10
---	10SP20-4	1.5	2		46	43	41	39	37	34	30	25	20	15
---	10SP30-4	2.2	3		66	62	59	56	53	48	42	36	28	20
---	10SP40-4	3	4		98	92	88	84	79	72	64	53	42	30
---	10SP55-4	4	5.5		130	123	118	112	106	96	85	71	56	40
---	10SP75-4	5.5	7.5		170	160	154	147	138	126	110	94	72	52
---	10SP100-4	7.5	10		230	216	208	197	184	168	148	126	100	70