




12SP 4

4" submerged pumps

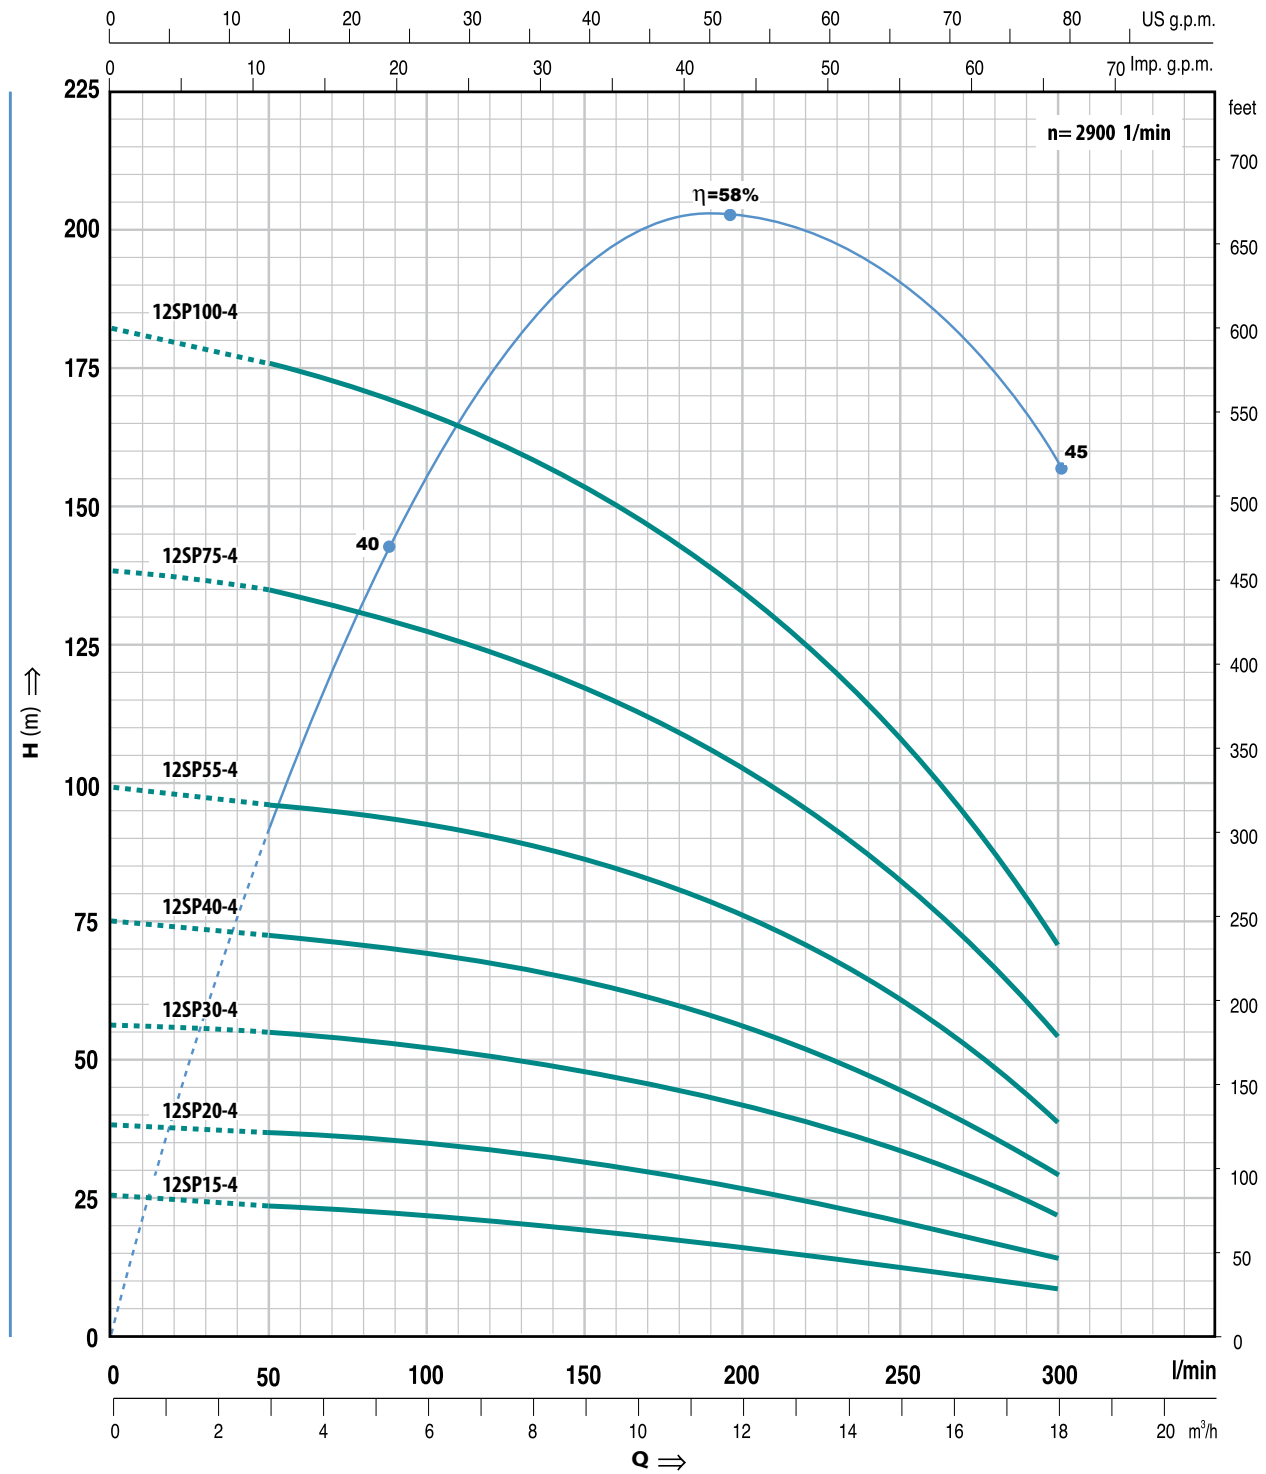

Q = Flow rate H = Total manometric head

Tolerance of the performance curves according to EN ISO 9906 App. A.

TYPE		POWER		m ³ /h l/min	0	3.0	6.0	9.0	12.0	13.2	14.4	15.6	16.8	18.0
Single-phase	Three-phase	kW	HP		0	50	100	150	200	220	240	260	280	300
---	12SP15-4	1.1	1.5	H metres	25	24	22	19	16	15	14	12	11	8
---	12SP20-4	1.5	2		38	37	35	32	28	26	24	21	18	14
---	12SP30-4	2.2	3		56	55	52	48	42	39	36	32	27	22
---	12SP40-4	3	4		75	73	69	64	56	52	48	43	36	29
---	12SP55-4	4	5.5		100	97	93	86	75	70	64	57	48	38
---	12SP75-4	5.5	7.5		138	135	127	118	103	96	88	78	66	53
---	12SP100-4	7.5	10		182	176	167	155	135	126	116	103	88	71