




12SP 6

6" submerged pumps

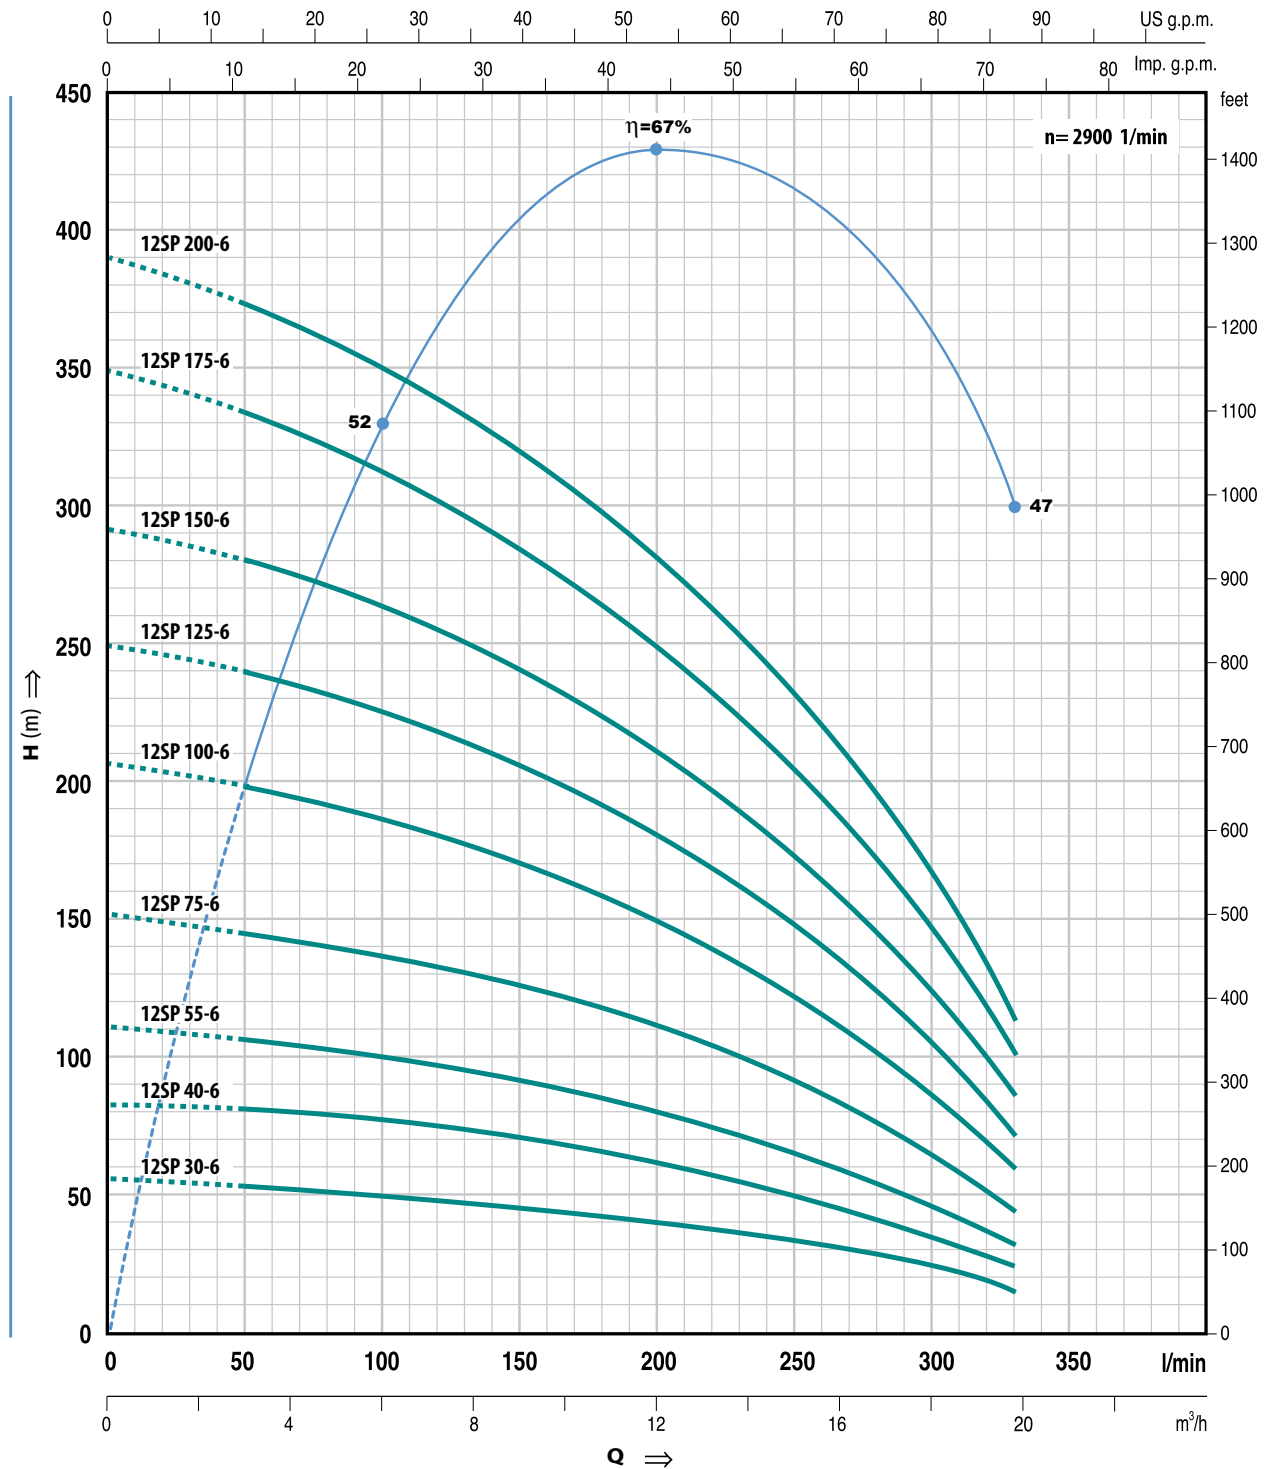

Q = Flow rate H = Total manometric head

Tolerance of the performance curves according to EN ISO 9906 App. A.

TYPE	POWER		m ³ /h l/min	0	3.0	6.0	9.0	12.0	15.0	18.0	19.8
	kW	HP		0	50	100	150	200	250	300	330
12SP30-6	2.2	3	H metres	56	53	50	46	40	33	24	16
12SP40-6	3	4		84	80	79	69	60	50	36	24
12SP55-6	4	5.5		111	106	100	91	80	66	47	32
12SP75-6	5.5	7.5		153	146	138	125	110	91	65	44
12SP100-6	7.5	10		208	199	189	171	150	124	88	60
12SP125-6	9.2	12.5		250	239	225	205	180	149	106	72
12SP150-6	11	15		292	279	263	239	210	174	124	84
12SP175-6	13	17.5		349	331	313	285	250	206	147	100
12SP200-6	15	20		390	371	350	319	280	231	165	112