




15SP 4

4" submerged pumps

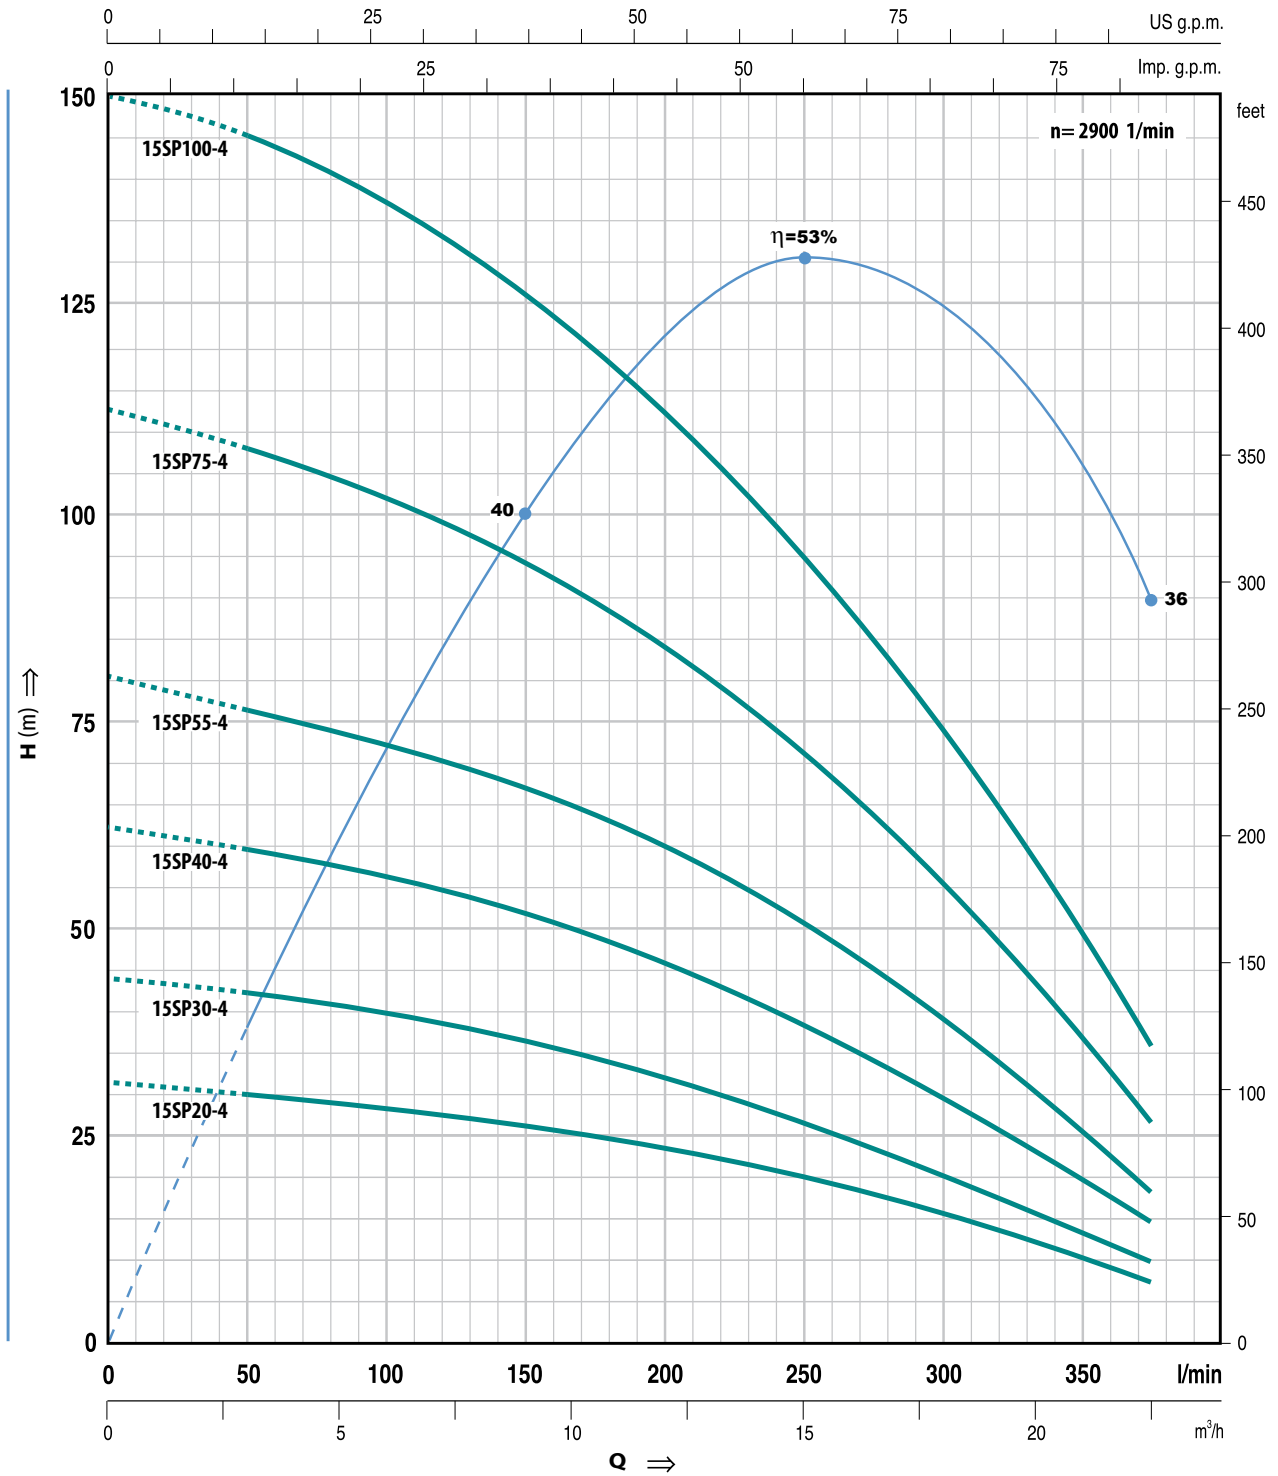

Q = Flow rate H = Total manometric head

Tolerance of the performance curves according to EN ISO 9906 App. A.

TYPE		POWER		m³/h l/min	0	3.0	6.0	9.0	12.0	15.0	18.0	21.0	22.5
Single-phase	Three-phase	kW	HP		0	50	100	150	200	250	300	350	375
---	15SP20-4	1.5	2	H metres	31	30	28	26	23	20	15	10	7.5
---	15SP30-4	2.2	3		44	42	40	37	32	27	20	13	10
---	15SP40-4	3	4		62	60	57	52	46	38	30	20	15
---	15SP55-4	4	5.5		80	77	72	68	60	50	40	25	19
---	15SP75-4	5.5	7.5		112	108	102	95	85	71	55	37	27
---	15SP100-4	7.5	10		150	145	138	126	112	95	75	50	36