




18SP 6

6" submerged pumps

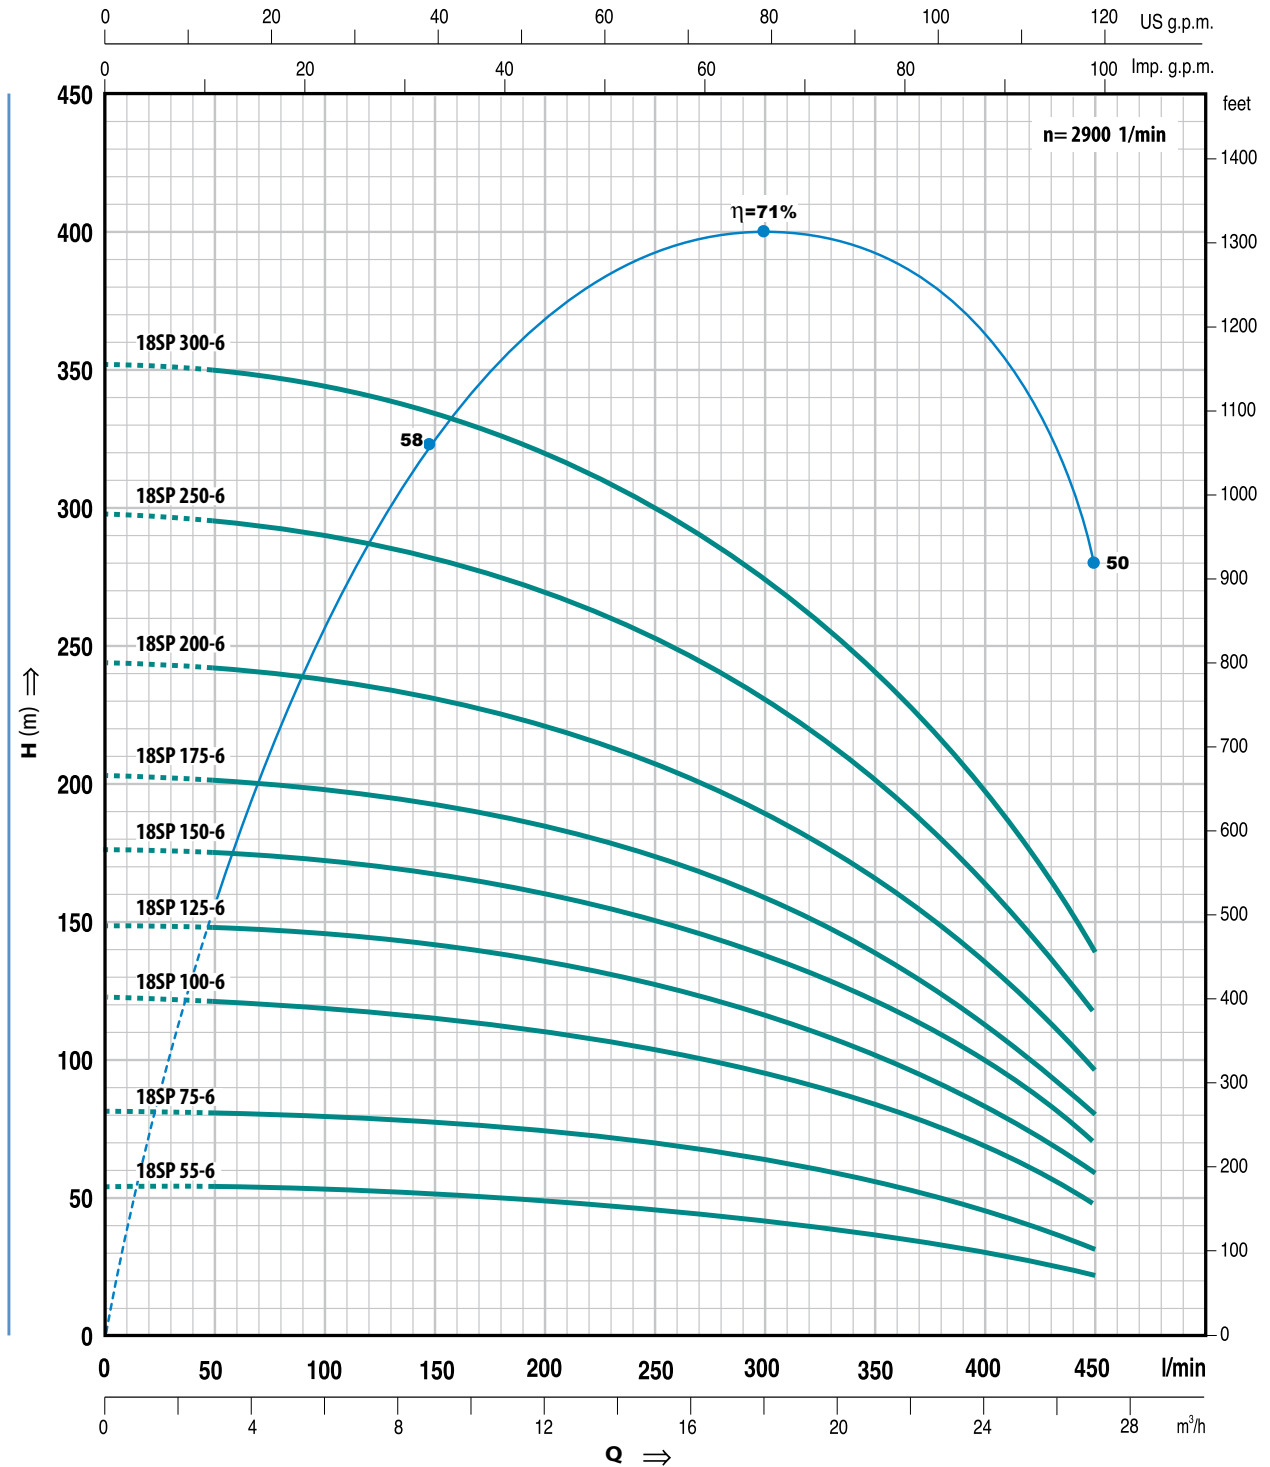

Q = Flow rate H = Total manometric head

Tolerance of the performance curves according to EN ISO 9906 App. A.

TYPE	POWER		m³/h l/min	H metres												
	kW	HP		0	3	6	9	12	15	18	21	24	27			
Three-phase				0	50	100	150	200	250	300	350	400	450			
18SP55-6	4	5.5		54	53.8	53	51	49	46	42	37	30	22			
18SP75-6	5.5	7.5		81	80.5	79	77	74	69	63	55	45	32			
18SP100-6	7.5	10		122	121	119	116	111	103	94	83	68	48			
18SP125-6	9.2	12.5		149	148	145.5	141	135	126	115	101	83	59			
18SP150-6	11	15		176	175	172	167	160	149	136	120	98	70			
18SP175-6	13	17.5		203	202	199	193	185	172	157	138	113	80			
18SP200-6	15	20		244	242	238	231	221	206	188	165	135	96			
18SP250-6	18.5	25		298	296	291	282	270	252	230	202	165	118			
18SP300-6	22	30		352	350	344	334	320	298	272	239	195	139			