




# 27SP 6

6" submerged pumps

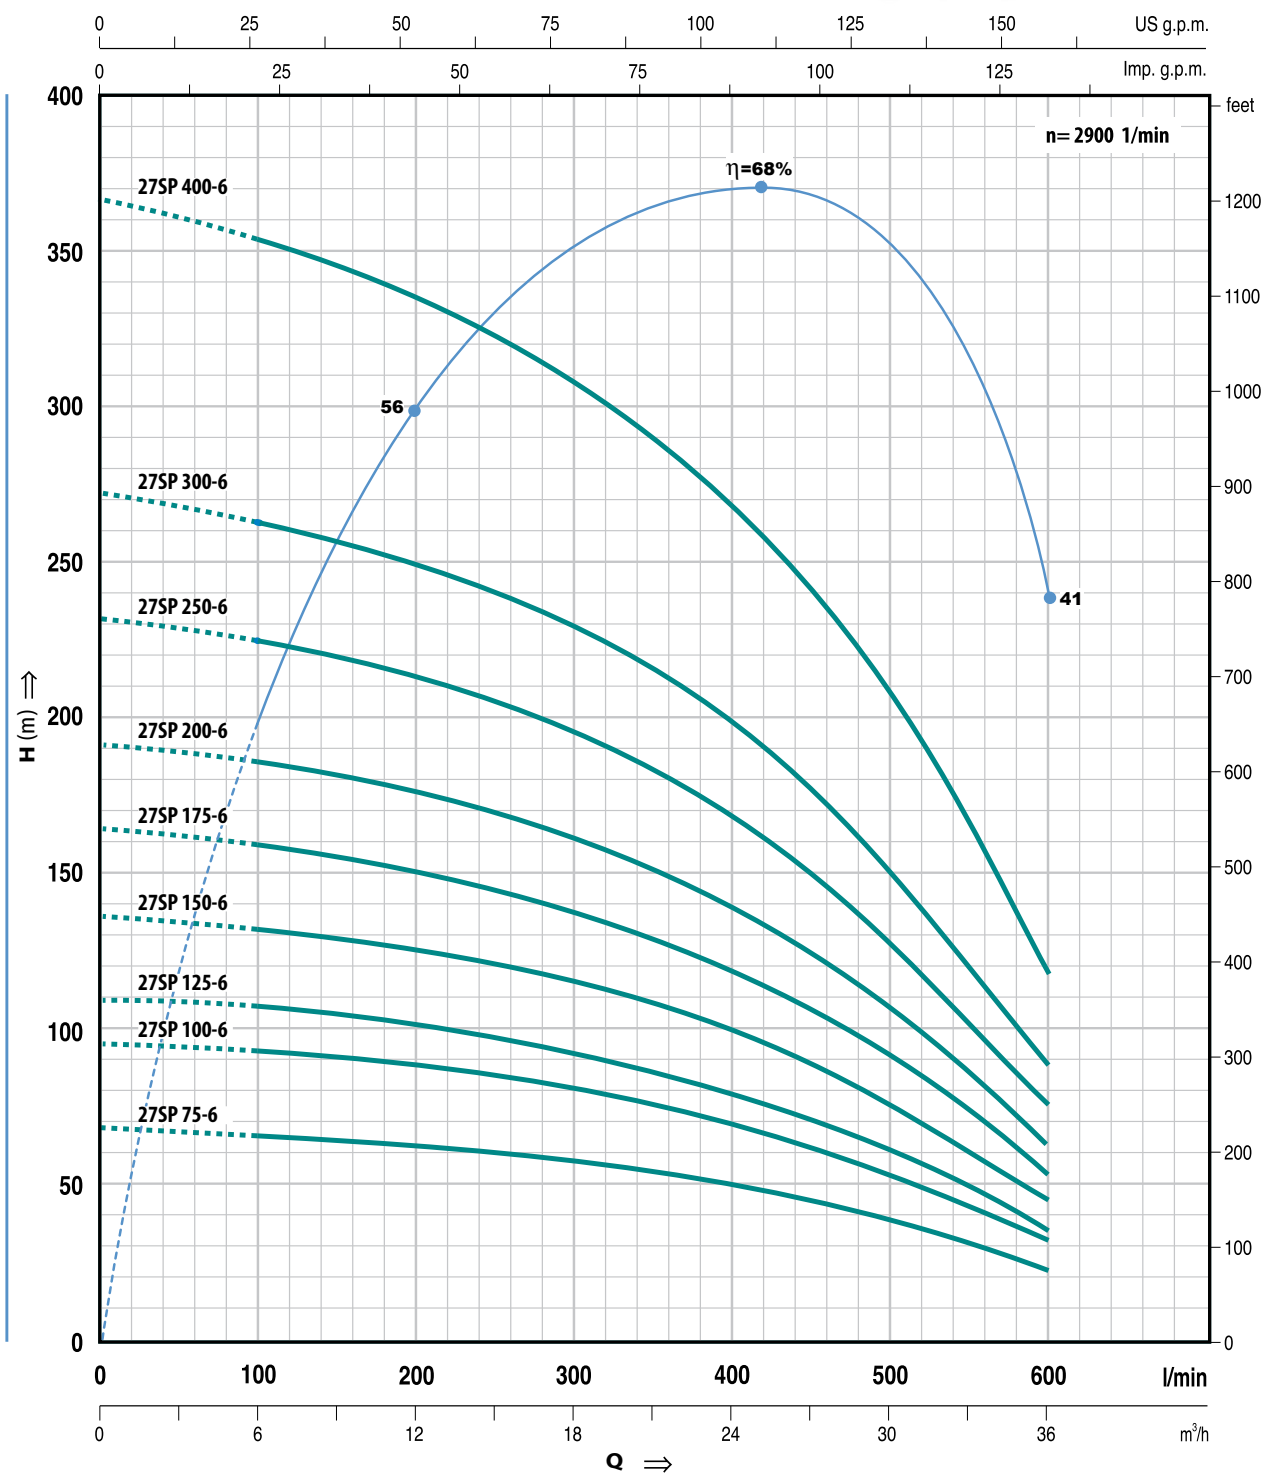

Q = Flow rate H = Total manometric head

Tolerance of the performance curves according to EN ISO 9906 App. A.

| TYPE      | POWER             |      | m <sup>3</sup> /h<br>l/min | 0   | 6   | 12  | 18  | 24  | 30  | 36  |
|-----------|-------------------|------|----------------------------|-----|-----|-----|-----|-----|-----|-----|
|           | Three-phase<br>kW | HP   |                            | 0   | 100 | 200 | 300 | 400 | 500 | 600 |
| 27SP75-6  | 5.5               | 7.5  | H metres                   | 68  | 66  | 62  | 57  | 50  | 37  | 22  |
| 27SP100-6 | 7.5               | 10   |                            | 95  | 92  | 87  | 80  | 70  | 52  | 31  |
| 27SP125-6 | 9.2               | 12.5 |                            | 109 | 106 | 99  | 91  | 80  | 59  | 35  |
| 27SP150-6 | 11                | 15   |                            | 136 | 132 | 124 | 114 | 100 | 74  | 44  |
| 27SP175-6 | 13                | 17.5 |                            | 164 | 159 | 149 | 137 | 120 | 89  | 53  |
| 27SP200-6 | 15                | 20   |                            | 191 | 185 | 174 | 160 | 140 | 104 | 62  |
| 27SP250-6 | 18.5              | 25   |                            | 231 | 224 | 211 | 194 | 170 | 126 | 75  |
| 27SP300-6 | 22                | 30   |                            | 272 | 264 | 248 | 228 | 200 | 148 | 88  |
| 27SP400-6 | 30                | 40   |                            | 367 | 356 | 335 | 308 | 270 | 205 | 119 |