




36SP 6

6" submerged pumps

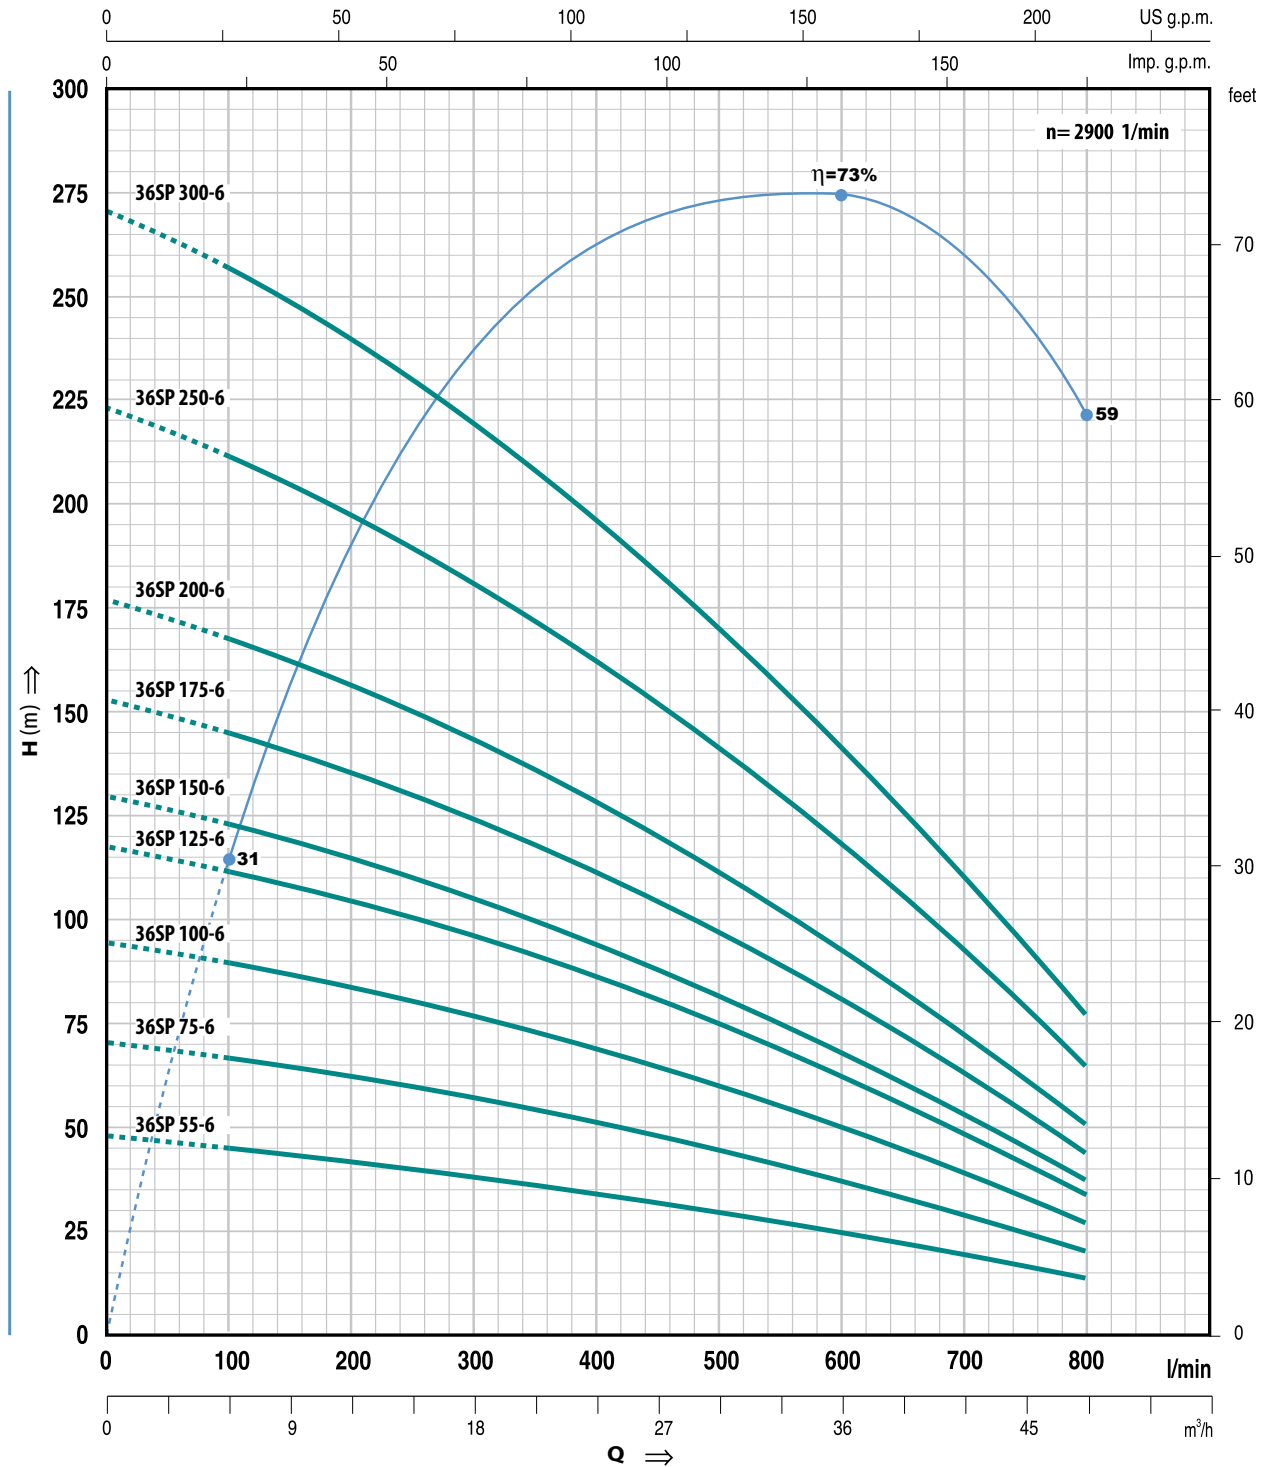

Q = Flow rate H = Total manometric head

Tolerance of the performance curves according to EN ISO 9906 App. A.

TYPE	POWER		m³/h l/min	H metres										
	kW	HP		0	6	12	18	24	30	36	42	48		
Three-phase				0	100	200	300	400	500	600	700	800		
36SP55-6	4	5.5		47	45	42	38	34	29	25	19	14		
36SP75-6	5.5	7.5		70	67	63	57	51	44	37	29	20		
36SP100-6	7.5	10		94	89	84	76	68	59	50	39	27		
36SP125-6	9.2	12.5		117	111	105	95	85	74	62	48	34		
36SP150-6	11	15		129	123	115	105	93	81	68	53	37		
36SP175-6	13	17.5		152	145	136	124	110	96	81	63	44		
36SP200-6	15	20		176	167	157	143	127	110	93	72	51		
36SP250-6	18.5	25		222	212	199	181	161	140	118	92	65		
36SP300-6	22	30		269	256	241	219	195	169	143	111	78		