




9SP 6

6" submerged pumps

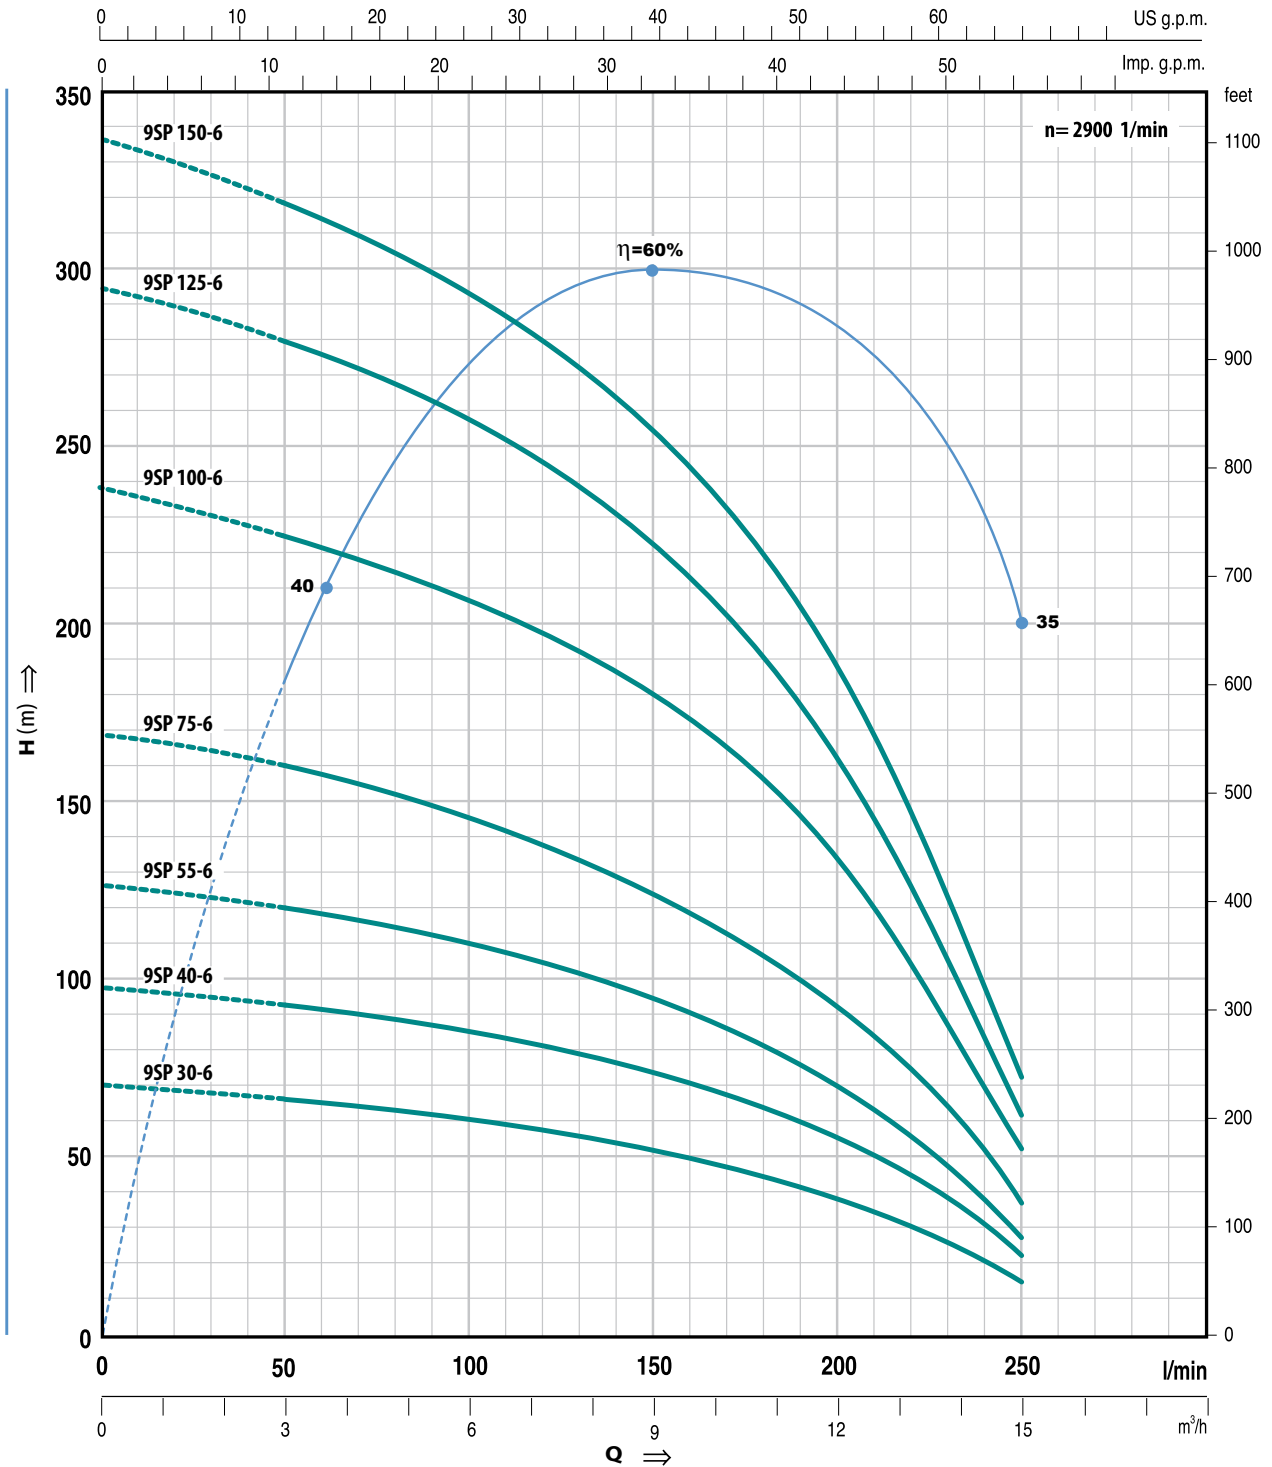

Q = Flow rate H = Total manometric head

Tolerance of the performance curves according to EN ISO 9906 App. A.

TYPE	POWER		m^3/h l/min	0	3	6	9	12	15
	kW	HP		0	50	100	150	200	250
9SP30-6	2.2	3	H metres	70	66	61	53	38	15
9SP40-6	3	4		98	92	85	74	53	21
9SP55-6	4	5.5		126	119	110	95	68	27
9SP75-6	5.5	7.5		168	158	146	127	91	36
9SP100-6	7.5	10		238	224	207	180	129	51
9SP125-6	9.2	12.5		294	278	256	222	160	63
9SP150-6	11	15		336	317	293	255	182	72